NOS-1546 Harben HPU unit

Specifiction



NOS Harben HPS's are a flushing and injection HPU with a radial diaphragm pump that reduces pulsation and gives an even flow, optimal for flushing and injection.


C-Pump on Frame	
Approvals	Norsok Z-015, DNV 2.7-1
Area Classification	ATEX Sone 1
Frame Size	2000x1200x1965mm (LxWxH)
M.G.W	2 000kg
Tare	650 kg
Max Payload	1 350kg
Z-015 Type	U99
Electric motor	34kw
Pump HPU	Harben 8.20
Flow & pressure	
Capacity @60 hz	0-54 lpm
MWP	345 bar
Process data	
Flow read	Flowmeter
Flow control	PCV
PRV	Yes
Tank	300L
Filter House	
Filter	3my - 944419Q
Supply connection	
Outlet	½" BSP
Return	½" BSP
Inlet to tank	2" FIG 206 (floater valve)
Inlet / Outlet Cooling water	1" Claw
Air	1" Claw
Power	440v,63A
Ambient Operating temperature	0 – 60 °C (below 0°C contact NOS)

NOS Rental Forusbeen 226
4313 Sandnes
TLF: 51733000

NOS-1546 Harben HPU

Pump Curves

Harben 8.20

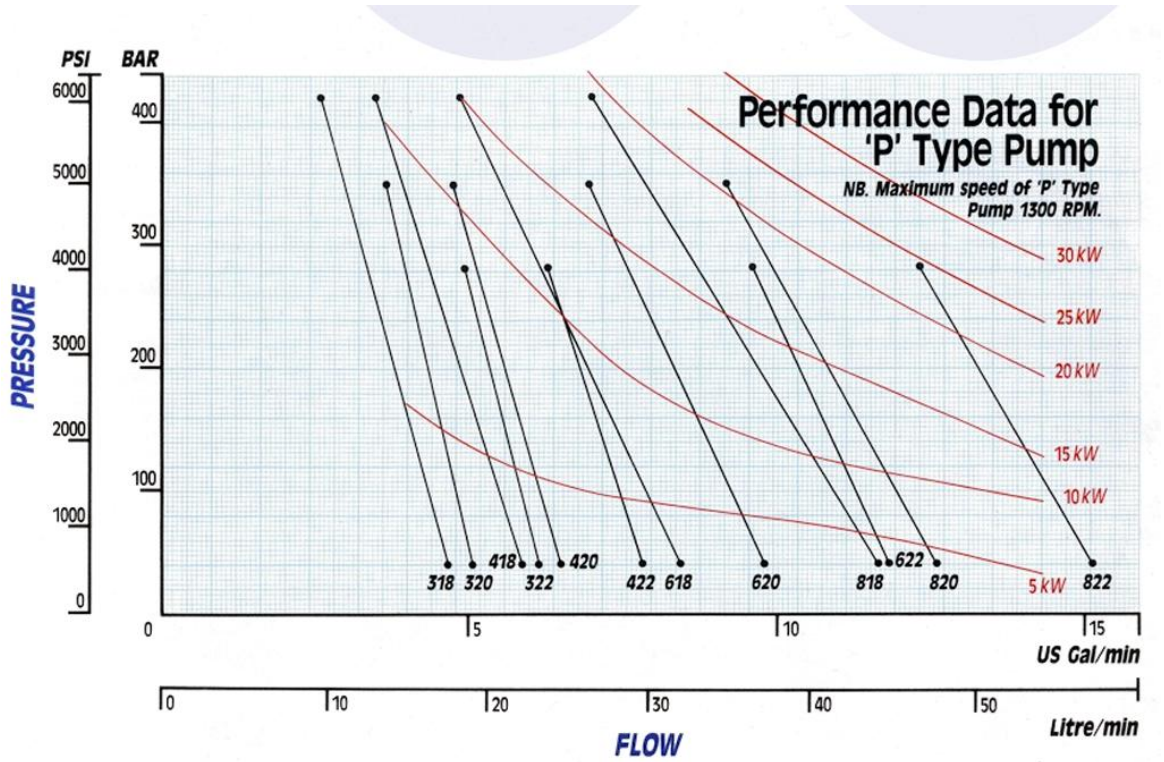

PERFORMANCE DATA FOR `P' TYPE PUMP AND HORSEPOWER REQUIRED

GRAPH SHOWS STANDARD P TYPE PERFORMANCE @ 960 RPM.
(6 POLE ELECTRIC MOTOR)

NOTE:-FOR PERFORMANCES OVER 4000 PSI, SPEC:441S49 (EN57)
STAINLESS STEEL BARRELS MUST BE USED.
SEE SEPERATE GRAPH FOR HI-LIFT, 1250 RPM PERFORMANCE (DIESEL)

